

# MARION COUNTY SURVEYOR'S OFFICE

## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR


SEC. 15 TWN. 14<sub>N</sub> RNG. 5<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 12-14-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison 4" down  
Method of Establishment: County: 7-21-1998  
IN S.P.C. E Zone, NAD 83  
Name: 14051503  
N: 490 667.479 1(m)  
E: 75 512.459 2(m)



Line of Southport 7000 S				
				County Line Rd 12000 E

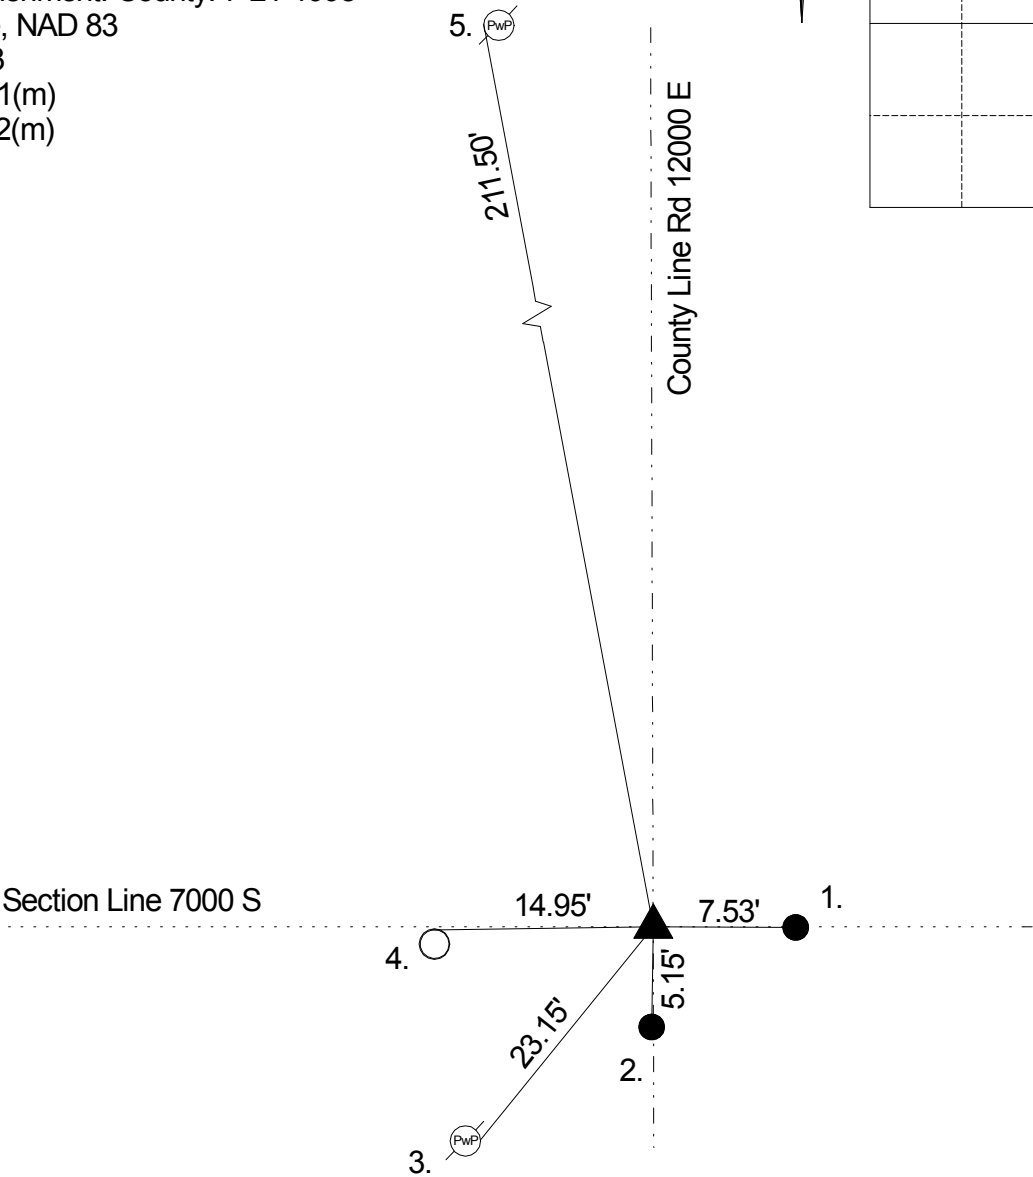

Original post set in 1820 by Hendricks with witnesses: 12" beech S 67 W 21 links, 10" beech S 60 E 34 links per Marion County Atlas p. 13. Franklin Township Legal Survey Book p.67 shows corner but does not describe what it is or date.. Corner reference, no date, called stone. 7-27-1964 called an iron rod over stone. Excavated 9-23-87, stone found 2" down, and rebar found .7' S of Harrison set. 7-21-98 Wilcoxen retied. 4-23-1999 Kiste retied. 9-25-2004 Wilcoxen retied. 12-14-09 Wilcoxen retied.

REF.	DISTANCE	DESCRIPTION
1.	7.53'	5/8" rebar set as tie
2.	5.15'	5/8" rebar set as tie (Fd bent to S)
3.	23.15'	PK nail E PwP #31-711 FA 12" uo
4.	14.95'	N edge of sign post
5.	211.50'	PK nail W PwP # 30-711 FA 12" up